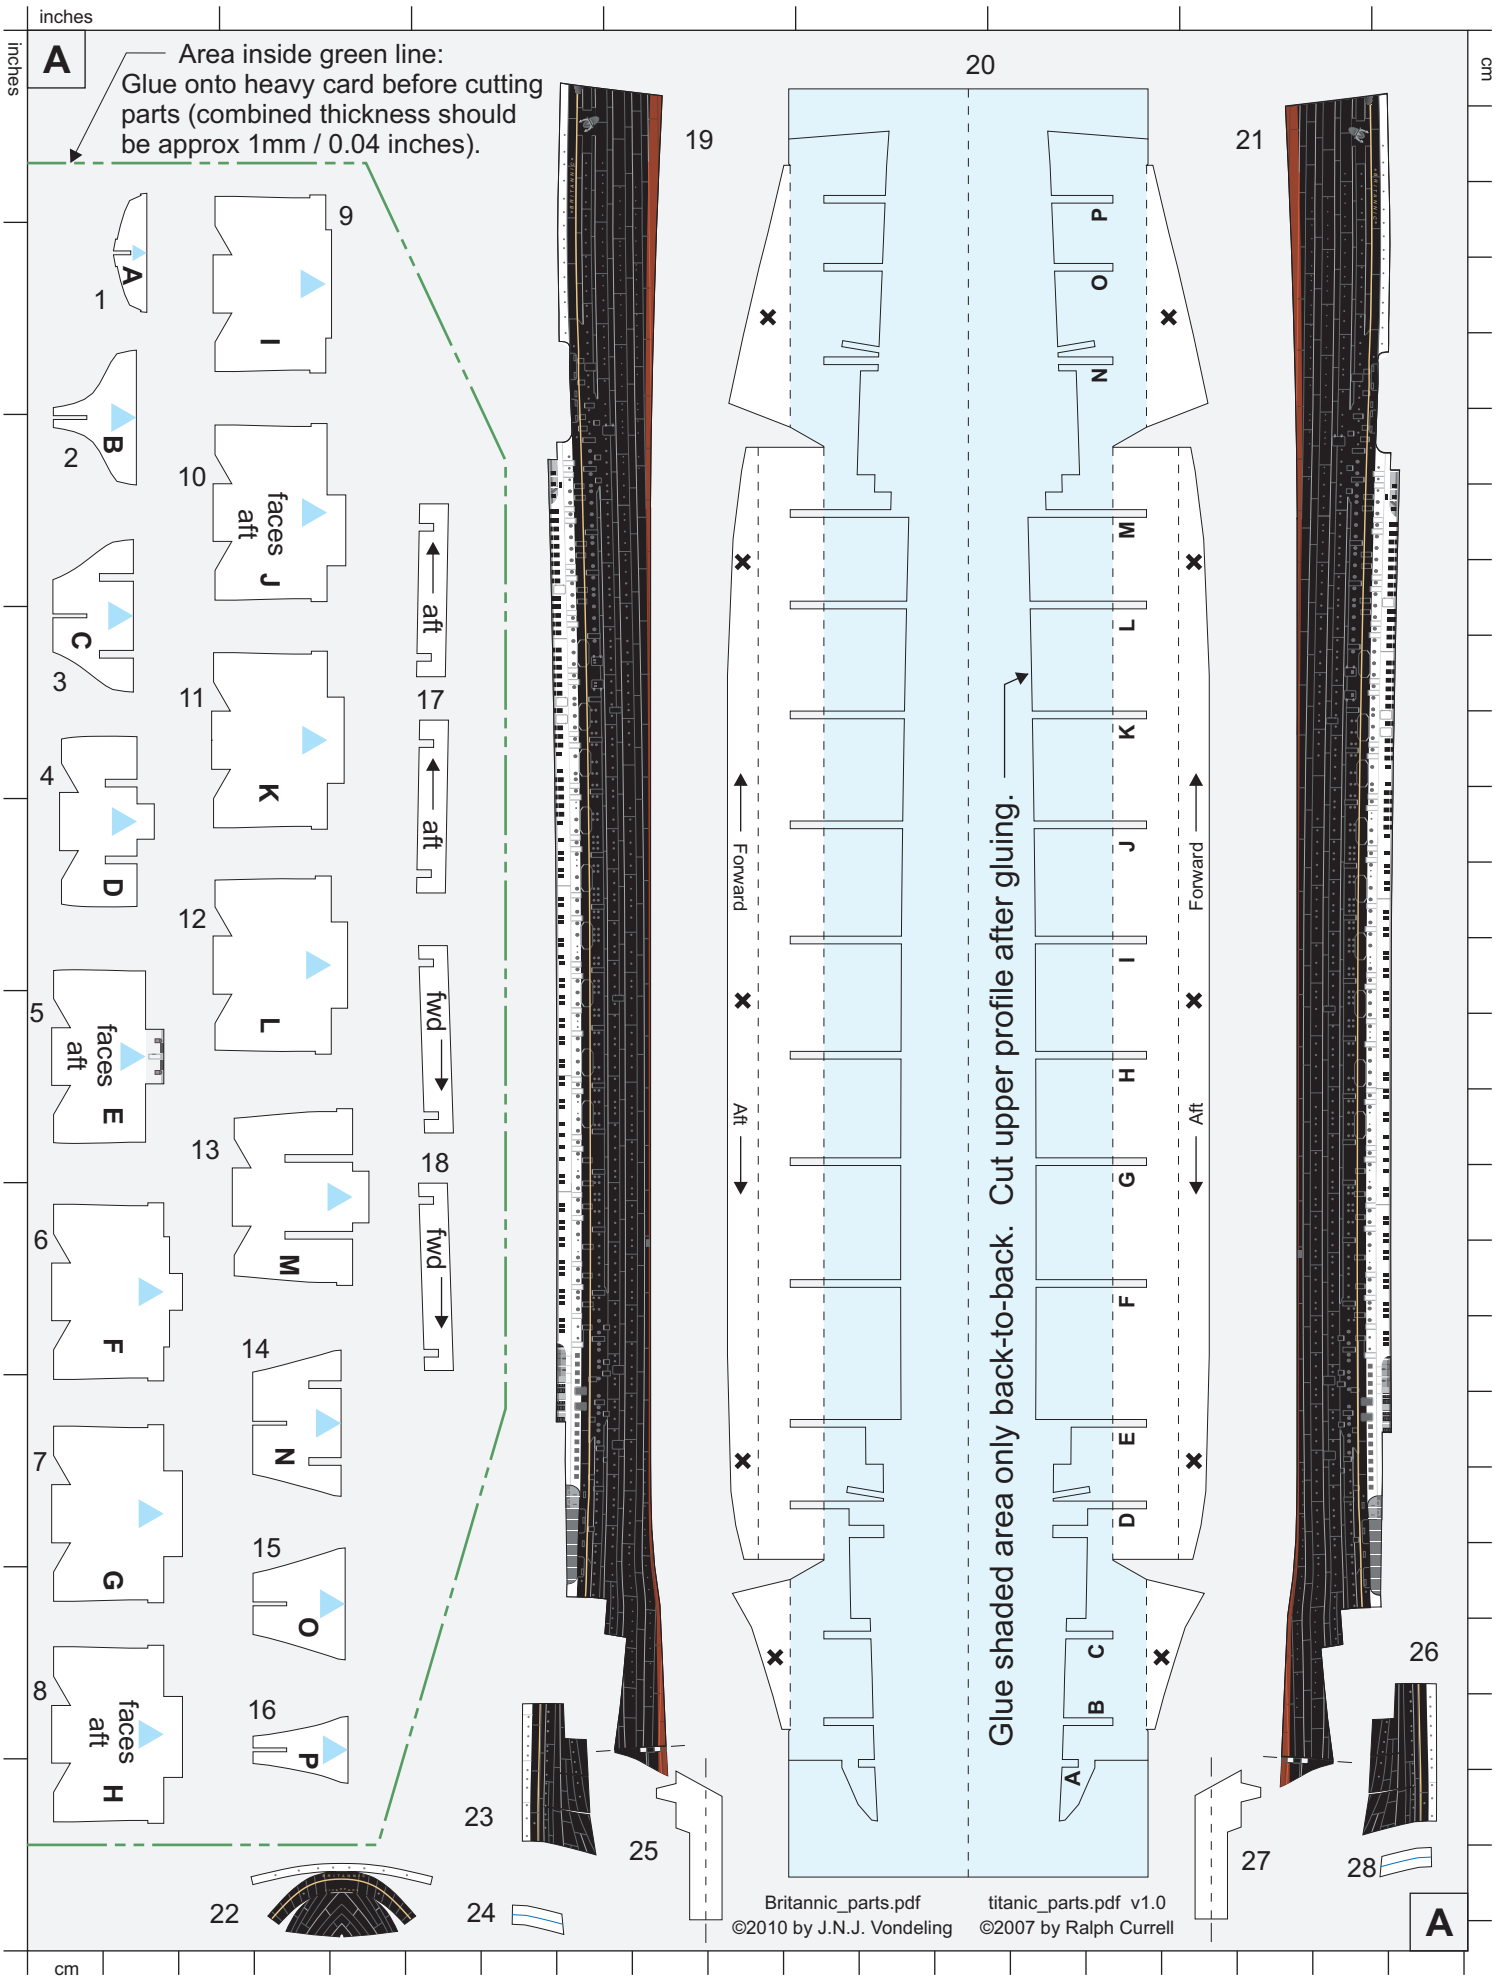
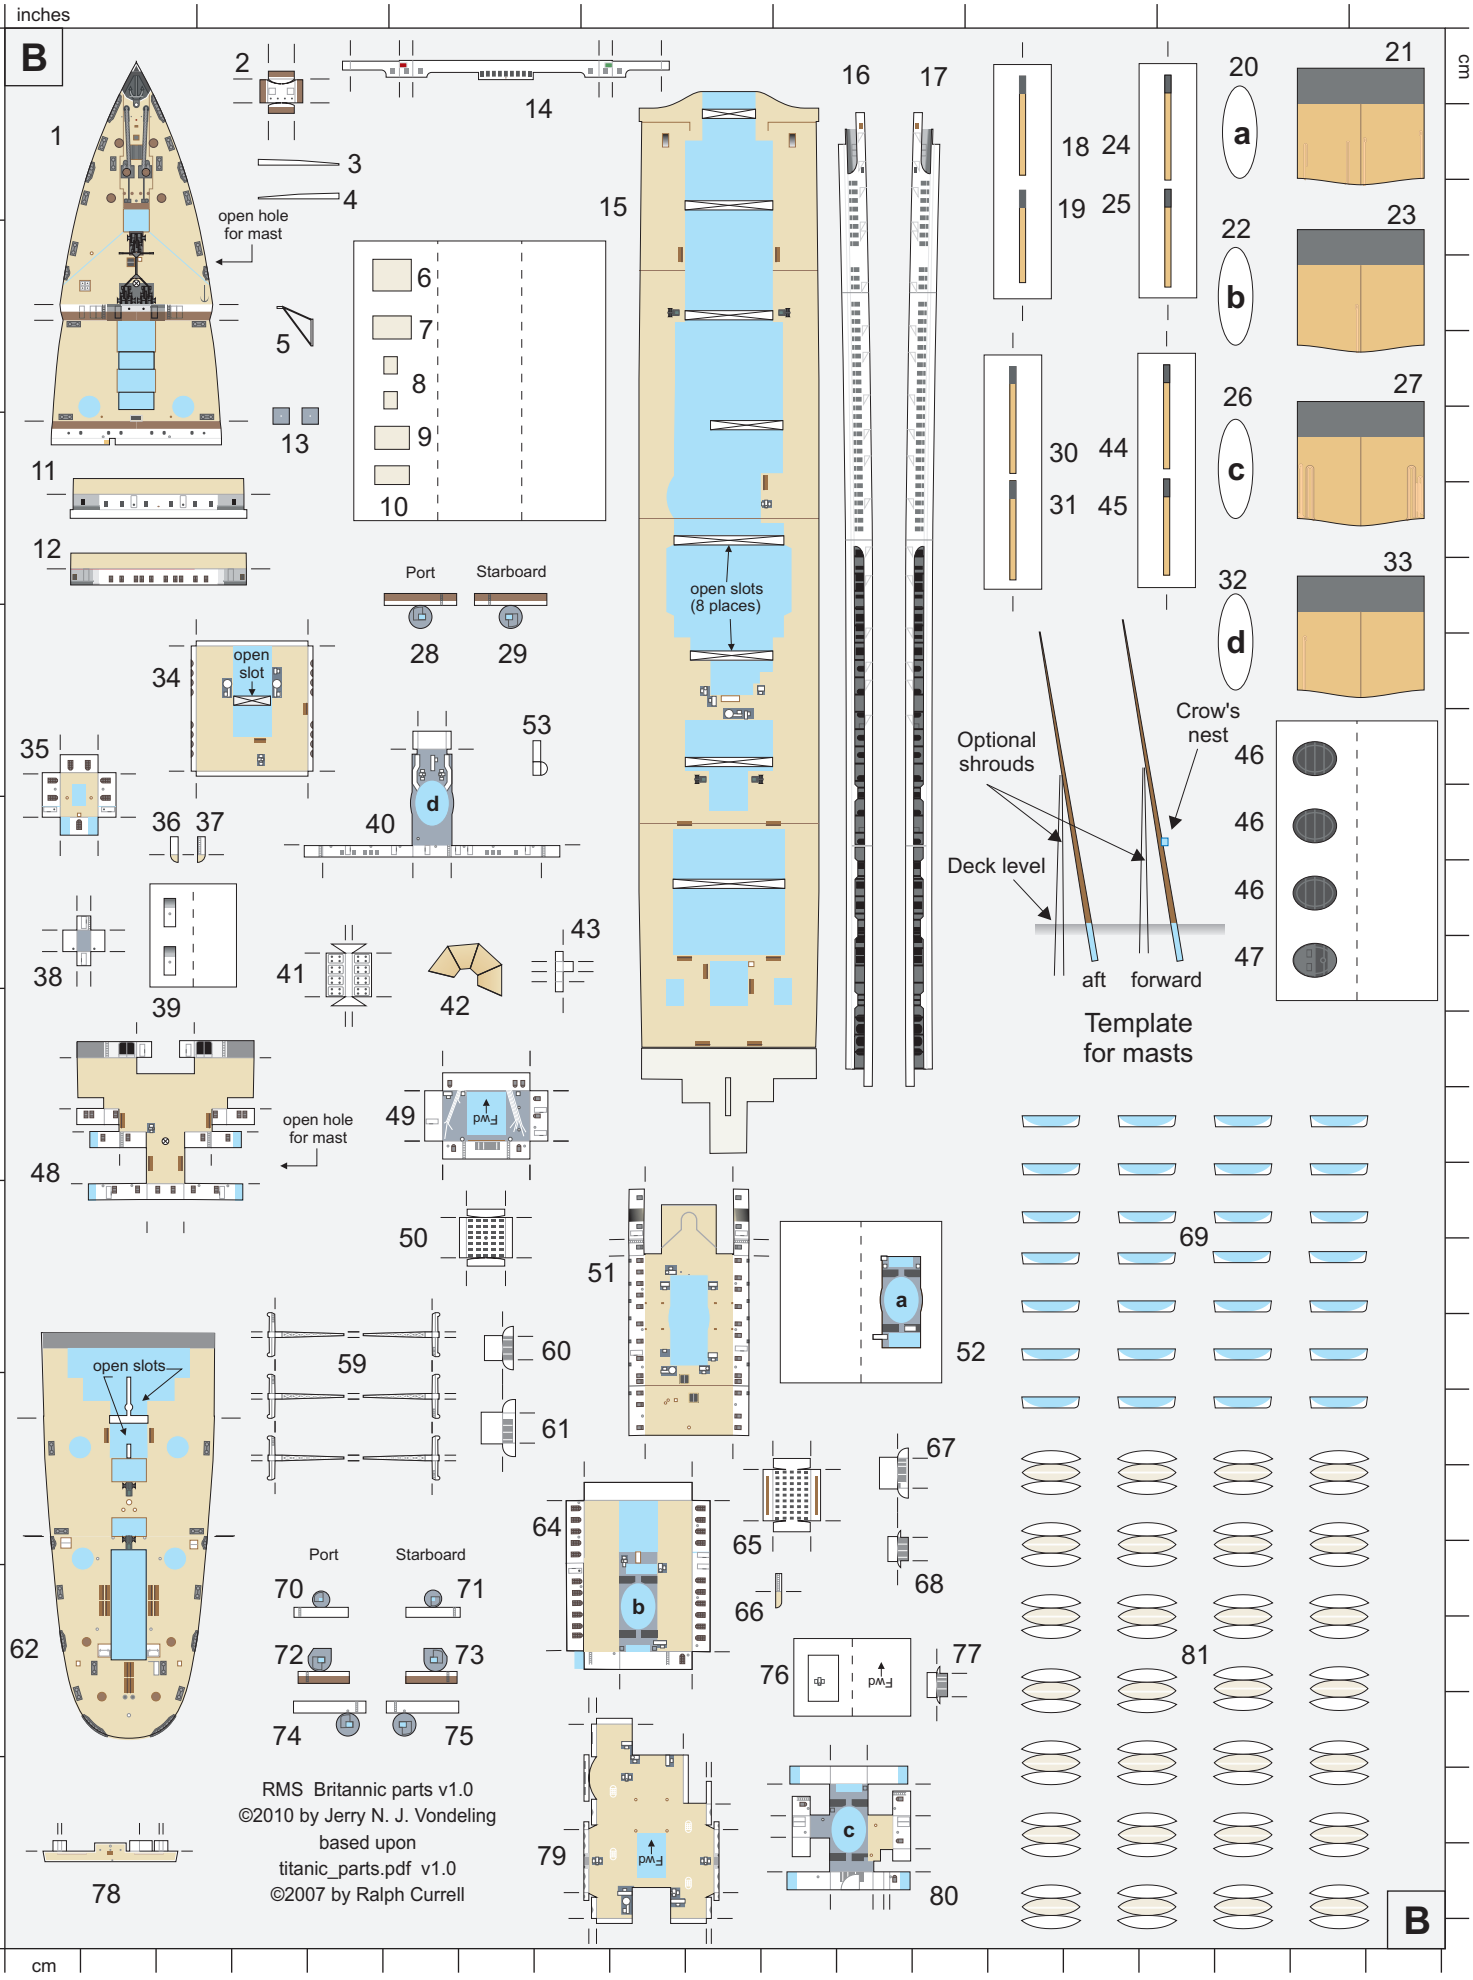
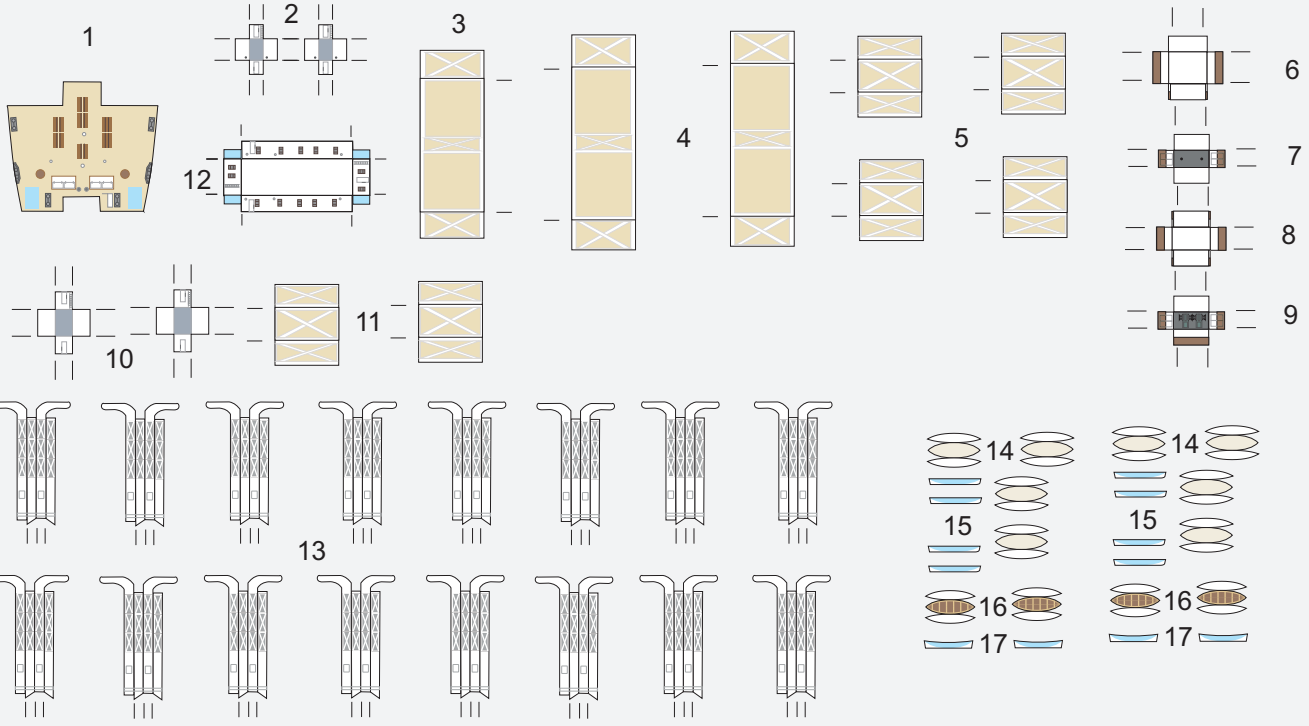
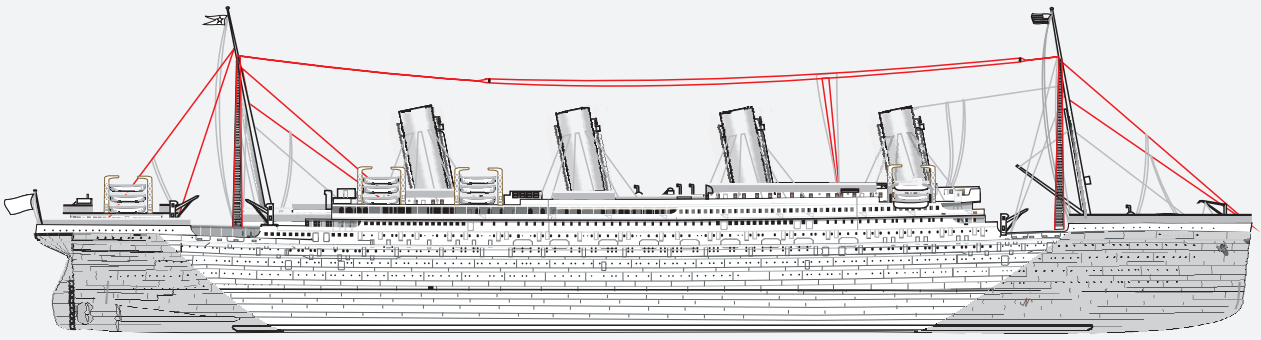

inches
cm
A
Area inside green line:
Glue onto heavy card before cutting parts (combined thickness should be approx 1mm / 0.04 inches).
Glue shaded area only back-to-back. Cut upper profile after gluing.
Forward
Aft
aft
fwd
faces aft
Britannic_parts.pdf
©2010 by J.N.J. Vondeling
titanic_parts.pdf v1.0
©2007 by Ralph Currell


inches
cm
B
1
2
3
4
open hole for mast
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
a
21
22
b
23
24
25
26
c
27
30
31
32
d
33
44
45
46
47
Crow's nest
Optional shrouds
Deck level
aft
forward
Template for masts
Port
Starboard
28
29
open slot
34
35
36
37
40
53
open slots (8 places)
38
39
41
42
43
48
49
50
51
52
69
59
60
61
62
open slots
64
65
66
67
68
70
71
72
73
74
75
76
77
81
78
79
80
RMS Britannic parts v1.0
©2010 by Jerry N. J. Vondeling
based upon
titanic_parts.pdf v1.0
©2007 by Ralph Currell



RMS Britannic parts v1.0
©2010 by Jerry N. J. Vondeling
based upon
titanic_parts.pdf v1.0
©2007 by Ralph Currell



Rigging plan for the 1:1200 model of the HMHS Britannic
You can add optional rigging to your build model using the above schematic for basic rigging, wich in my opinion is enough for the 1:1200 scale model
For larger upscaled models you might wish to extend your rigging

Britannic side vieuw drawn by Jerry N. J. Vondeling

C